




LA Techniques Ltd

### LA32-04-10 DUAL 20 Gb/s DRIVER AMPLIFIER




The LA32-04-10 is a power amplifier mainly intended for use as an optical modulator driver. It is able to support data rates to 2 x 23 Gb/s with good pulse response and low jitter. Some of its key features are as follows.

- 30 kHz - 20 GHz Bandwidth
- > 7 v<sub>pp</sub> Output at 23 Gb/s
- Low power dissipation (<3 W per channel)
- Crossover adjustment
- Output level control
- Output level detector
- Environmentally sealed
- Cost effective

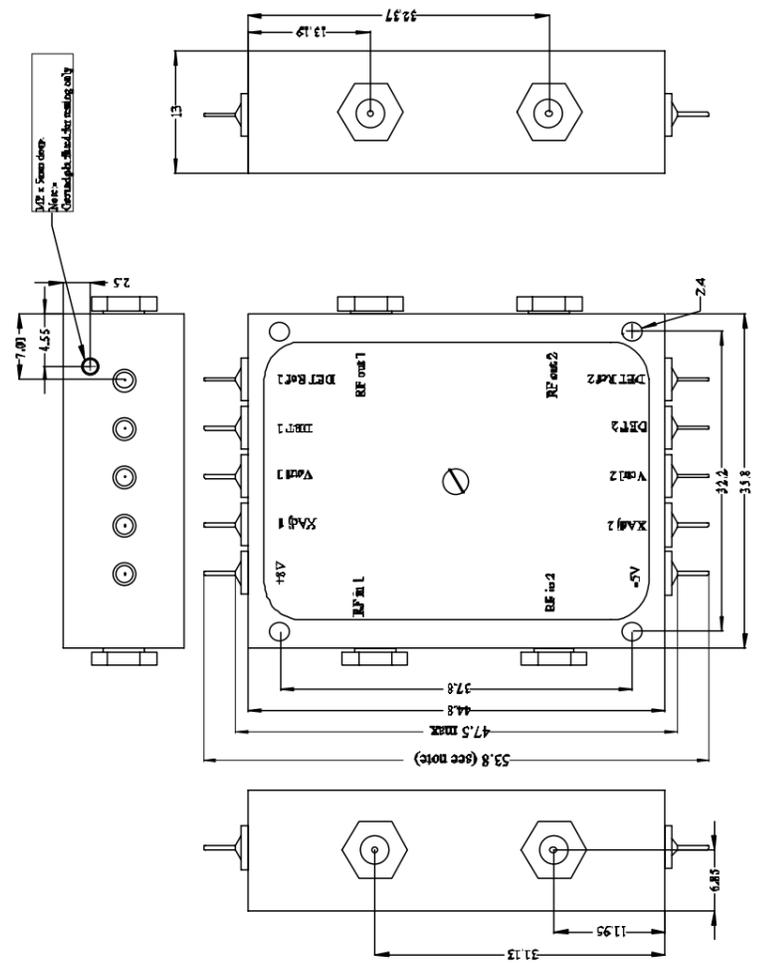

All dimensions in mm  
Finish is gold plate

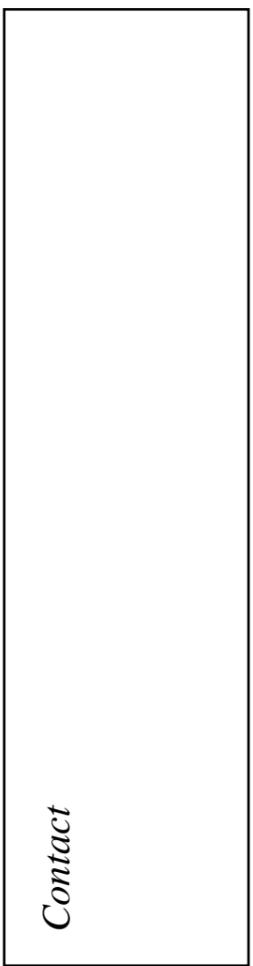

Unit 5, Chancerygate B/Centre,  
Surrey KT6 7RA, England  
www.latechiques.com





Manufactured in the UK  
Specification subject to change without notification

**Electrical Specification**  
(0°C to +60°C Case Temperature)

Parameter	Units	Min	Typ	Max
Bandwidth				
Low frequency 3 dB point	kHz	-	30	60
High frequency 3 dB point	GHz	18	19	-
Gain (non-inverting)	dB	24	25	30
Gain ripple				
500 kHz - 16 GHz	dB	-	±2.0	±3.5
Input return loss (f < 16 GHz)	-	8	10	-
Output return loss (f < 16 GHz)	-	8	10	-
Output voltage <sup>2</sup> , V <sub>max</sub>	V <sub>pp</sub>	7.0	8.0	-
Output voltage control range	V <sub>pp</sub>	4.0	-	V <sub>max</sub>
Output control voltage range	V	-10	-	-1
Output temperature stability <sup>4</sup>	%	-	5	10
Detector output <sup>1</sup>	V	-	0.45	-
Detector output resistance	kΩ	-	15	17
Pulse characteristics <sup>1,2,3</sup>				
Rise time (10 – 90%)	ps	-	15	20
Fall time (10 – 90%)	ps	-	15	20
Over / undershoot	%	-	5	10
Droop (time < 10 ns)	%	-	5	-
Jitter (peak to peak)	ps	-	5	8
Typical crossover adjustment range <sup>1</sup>	%	-5	-	+5
Crossover control voltage range	V	-5	-	+5
Supply voltage (positive)	V	+8.2	+8	+7.8
Supply current (positive) <sup>1,2</sup>	mA	-	340	400
Supply voltage (negative)	V	-4.9	-5	-5.1
Supply current (negative) <sup>2</sup>	mA	-	55	65
Operating case temperature	°C	-10	-	+65

- Notes: 1. 20 Gb/s 2<sup>23</sup>-1 PRBS data, 7.0 V<sub>eye</sub> output  
 2. 0.5 V<sub>pp</sub> input drive, 18 ps input rise / fall time, per channel  
 3. Output set < 7 V<sub>pp</sub>  
 4. Output set between 5 and 7 V<sub>pp</sub> at 25°C

**20 Gb/s Eye Diagram**  
(output set to 7V)

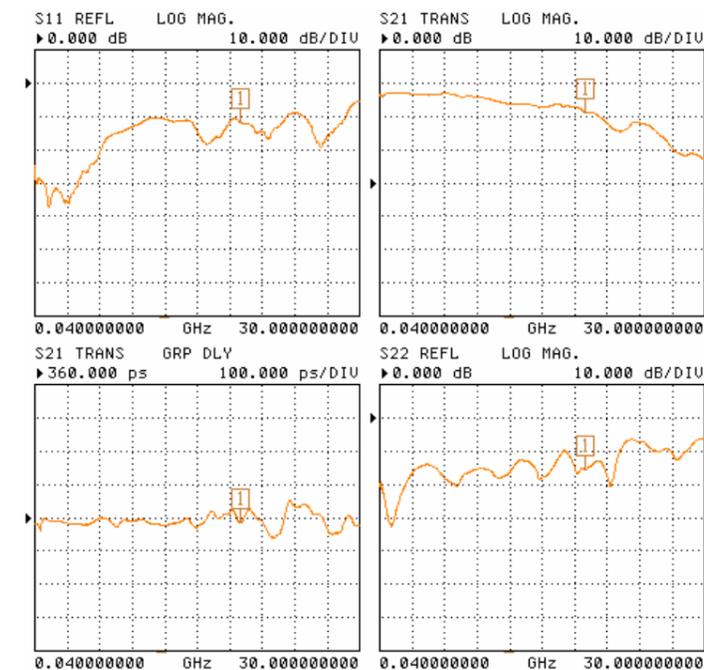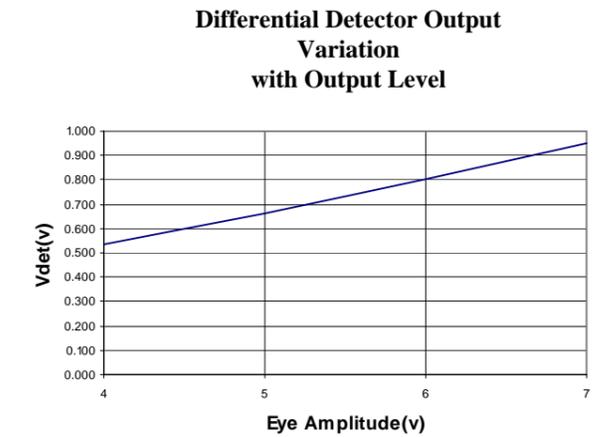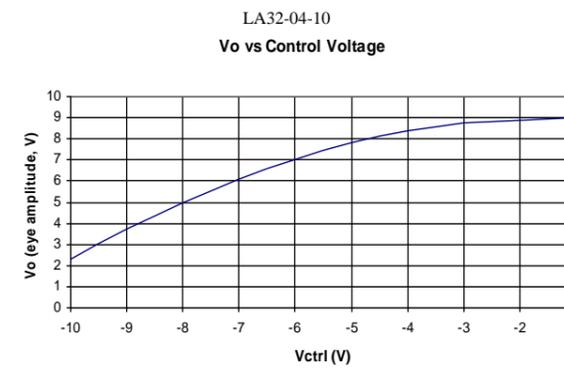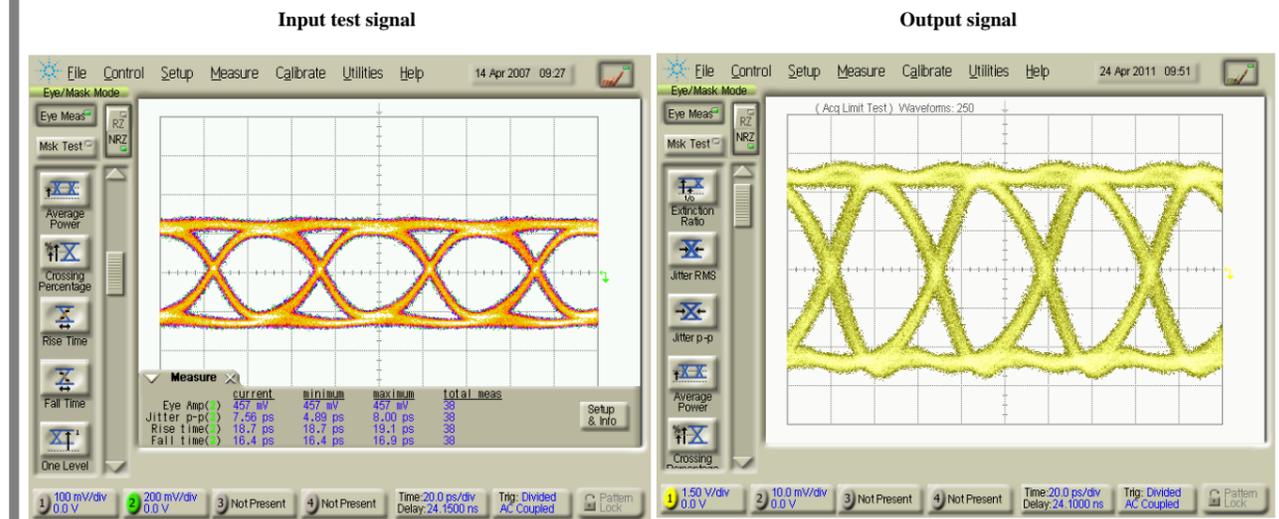

CH 2 - S21  
 0.0000 mm REF  
 0.000 dB OFFSET  
 0.00° OFFSET

MARKER 1  
 19.120000000 GHz  
 21.005 dB

MARKER TO MAX  
 MARKER TO MIN

**Small signal response**

MARKER READOUT FUNCTIONS